

***Tenveo***

TEVO-AX3

USB speakerphone

(omnidirectional microphone manual )



Tenveo makes any meeting better and easier

# AX3 Array Omnidirectional Microphone


## Product features

This array microphone uses DSP voice algorithm, remote pickup, and automatic gain control. These features made the sound input volume not affected by the distance

Using DSP digital noise reduction, effectively reduce the interference of background noise to the sound quality

Using the array of omnidirectional high sensitivity microphone, suitable for recording and broadcasting classrooms, conference rooms and other high request occasions

Suitable for ceilings and wall-mounted installation

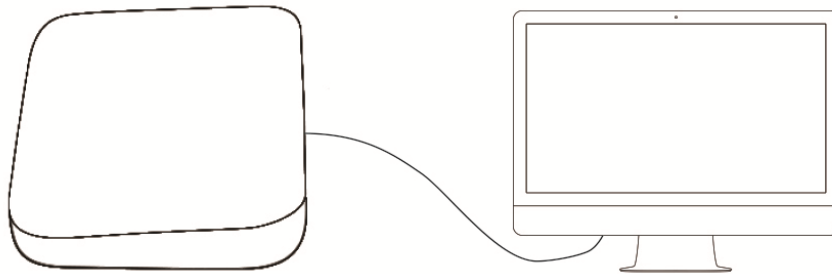

## Technical Parameters

Operating voltage / current:12V DC 100mA	Noise reduction : 12dB
Pickup distance: 10m (Max)	Auto gain control: 20dB
Gain : 40dB	Directivity: omnidirectional
Frequency response:100Hz-16KHz	Output impedance : 200ohm
Dynamic Range : 87 dBfs	Dimensions:14.3mmX12.5mmX3mm
Total harmonic distortion:1% ( Max )	Output connection: 3.5mm audio interface

