

T300 **User Manual**



1.Packing List

Thank you for choosing our products.

Please confirm whether the packaging of the product you purchased is complete. If the packaging is damaged or there is a shortage of any accessories, please contact your dealer as soon as possible.◦


- ☐ Product x 1
- ☐ User Manual x 1
- ☐ Power
- ☐ Emergency Battery x 1 (Optional)

2.Specifications


CPU	- Intel® TigerLake-U CPU,TDP 28W
GPU	- Intel® Iris® Xe Core GP,expandable to A370M MXM Discrete GPU
Memory	- 2 x SO-DIMM DDR4 3200 MHz Max 64GB
Storage	- 1 x M.2 2280 SATA - 1 x M.2 2280 Nvme
Wireless Network	- 1 x M.2 2230 slot,expandable to 802.11b/g/n/ac/ax modules
I/O Interface (Front)	- 1 x Power Button - 4 x USB2.0 - 1 x Type-C
I/O Interface (Back)	- 1 x 2.5/5.5 DC IN Jack - 2 x HDMI in - 2 x HDMI out - 2 x USB3.2 - 1 x 1000M RJ45,1 x 2500M RJ45 - 2 x Mic In - 1 x Line Out - 1 x GPIO
BIOS	- AMI UEFI BIOS
WatchDog	- Support
System(OS)	- WINDOWS 10/WINDOWS 11
Power	- 19V DC IN,2.5/5.5 DC Jack
Environment	- Working temperature: -10~50°C (without battery) . 0~40°C(with battery) - Storage temperature: -20~70°C (Host storage) . -20~25°C(Battery storage) - Working humidity: 90% non-condensing, Storage humidity: 90% non-condensing
Dimension	- 238 x 168 x 59.6 mm(With battery base) - 238 x 168 x 41.6 mm(Without battery base)

3.I/O Interface

Front

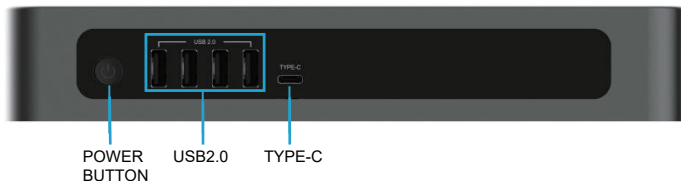

Back

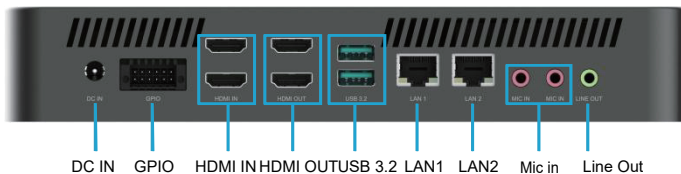

- POWER BUTTON: Power On/Off
- USB2.0: USB2.0 connection interface
- TYPE-C: TYPE-C connection interface
- DC IN: DC power interface
- GPIO: Universal input and output interface
- HDMI IN: HDMI signal input interface
- HDMI OUT: HDMI signal output interface
- USB3.2: USB3.2 connection interface
- LAN1: RJ-45 (1000M) connection interface
- LAN2: RJ-45 (2500M) connection interface
- Mic in: Microphone input signal interface
- Line out: Audio output interface