

KB200 IP Keyboard Controller



KB200 PTZ camera controller is made for broadcast, professional video conferencing and live streaming. It can control up to 255 PTZ cameras via LAN port or serial interfaces. Multi-function joystick and intuitive buttons ensure fast and precise real-time adjustment. The remote PTZ controller enables you to remotely control pan/tilt/zoom and their speed, lock moves, and incorporates a LCD screen, displaying real-time status of PTZ cameras. KB200 supports 12V DC power supply and Power-over-Ethernet (PoE).

Low Latency Controller

Responsive PTZ joystick with 8-direction movements at variable speed provides full control and low latency over pan-tilt-zoom. The PTZ camera joystick is built with full metal and scratch-resistant surface protector. It has simple elegant appearance with ergonomics design.



Comfortable Operations

High-Quality variable speed 4D joystick with full function silicon rubber button makes you enjoy smooth control.

Single Cable Simplicity-PoE support

KB200 supports Power Over Ethernet (PoE). Take control of cameras all across your network with a single Ethernet cable. Use PoE network switch to simplify your Joystick setup.



Multiple Control and Network Protocols

The joystick controller supports multiple control protocols: VISCA, Pelco via serial RS232 and RS422/RS485, ONVIF, NDI and Visca over IP . Visca is fully compatible.




Universal Compatibility


VISCA, NDI, VISCA over IP, Onvif, PELCO-P, PELCO-D protocols are fully compatible.

Multiple Use Scenes with PTZ Cameras

KB200 video conference PTZ camera control keyboard is designed for simple, quick and accurate control of PTZ cameras and can be used in various important conferencing venues, such as government and telecommunications departments, public security, procuratorates, courts, banks, securities, insurance, education, taxation, etc.

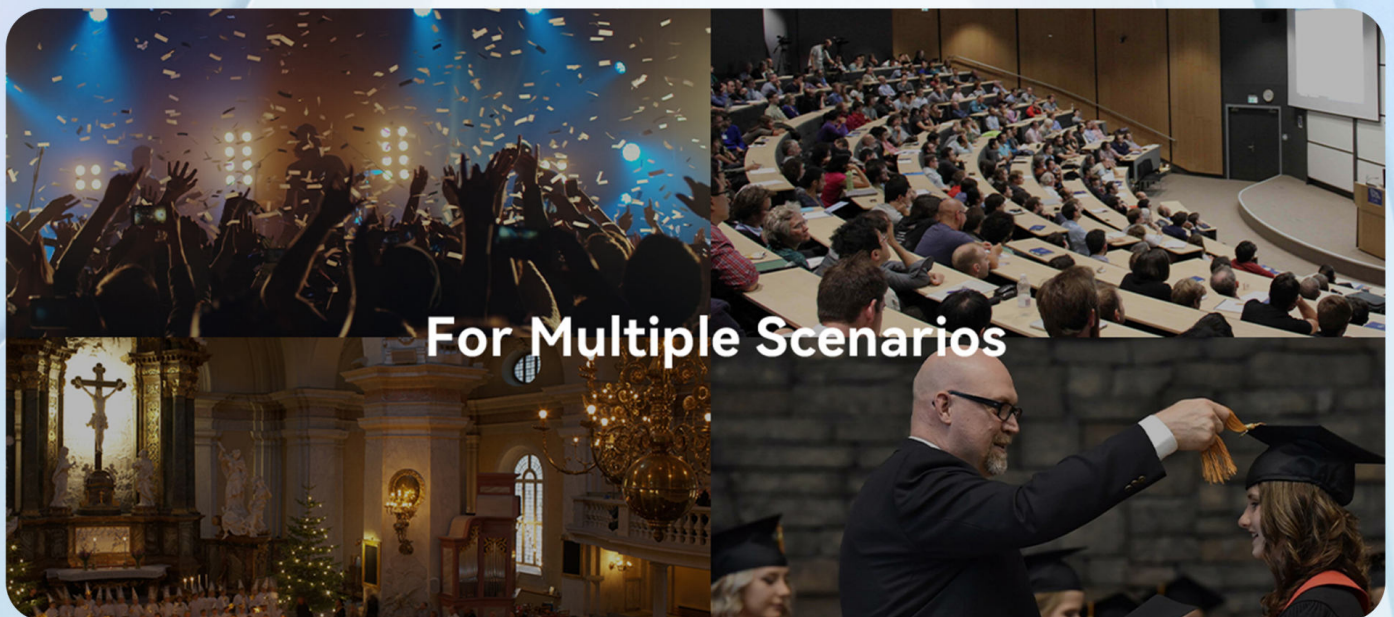

The Back Interfaces Introduction

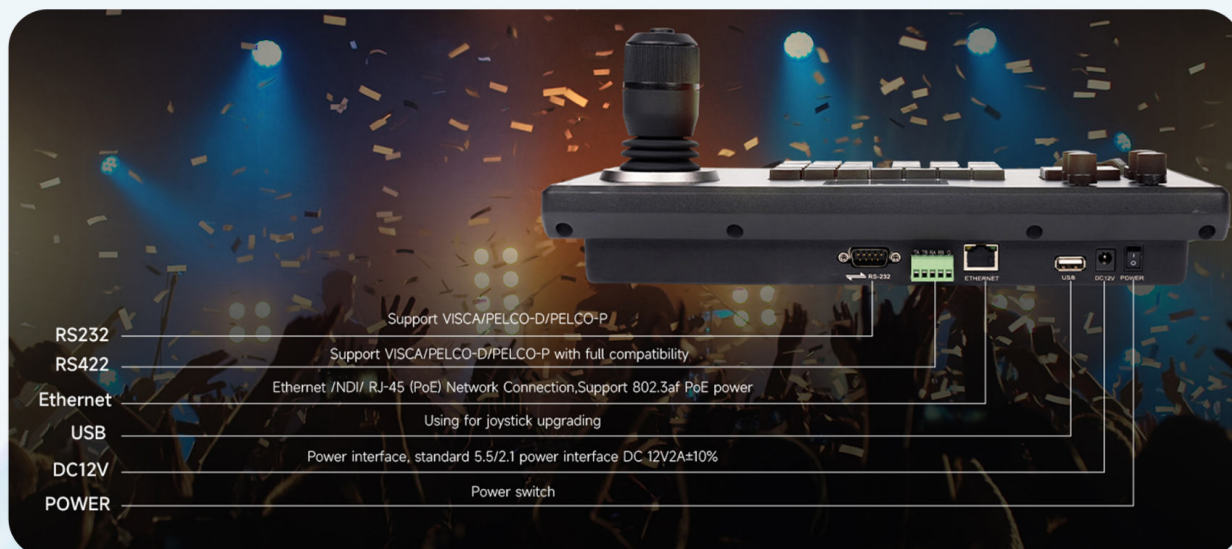

KB200 IP Keyboard Controller

Model No.	KB200
Chip	His3536DV100
System	Linux
Protocol	Full VISCA, ONVIF, NDI, PELCO-P, PELCO-D
Output	RS422/RS485, RS232, RJ45
Accessories	Seesaw switch, knob, mechanical button, 4D joystick
Screen	TFT LCD 320*240
Power Consumption	≤5W
Power	DC12V-2A
Working Temperature	-10°C~55°C
Working Humidity	20%~80% Frostless
Storage Temperature	-10°C~55°C
Storage Humidity	0%~90% Frostless
Packing Size	354*221*135mm
Net Weight	1630g/set

KB200 can control up to 255 PTZ cameras.

Note: The controller and PTZ cameras must be connected to the same LAN, and IP addresses must be at the same segment.

Hotline : 400-1080-686
Tel : 0086-755-8526-1373
Email : sales01@tenveo.com
Address : A-1st Floor, B-8th Floor, Fukang Keji Mansion, Yousong Road,
Fukang Community, Longhua Dist., ShenZhen, China

